



Chemical Consultants INCORPORATED

AQ-SOLV

LOW VOC Press Wash / Spray & Wipe

GENERAL DESCRIPTION


AQ-SOLV is designed for all inks, especially vinyl, water base, epoxy, enamel and UV inks. This product will perform as a press wash when changing colors between jobs and/or as a screen opener for continuous printing. AQ-SOLV will protect the fabric from deep stains or ghosting from the image print. This makes it much easier when complete reclamation of the screen is necessary.

ADVANTAGES

- **Fast Drying**
- **Emulsion safe**
- **High solvency**
- **Low Odor**
- **Low VOC (Volatile Organic Compound)**
- **High load capacity to reduce usage**
- **Mesh Safe**

APPLICATION


First card excessive ink from the screen.

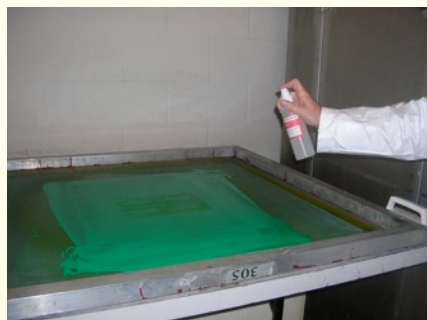

Step 1. Spray press wash on squeegee side of screen.



Step 2. Scrub ink with a nonabsorbent pad until liquified.

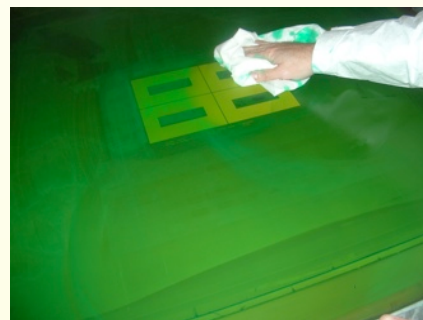

Step 3. Use rags or towels to wipe up ink residue. Re-apply to clean up ink residue in image area.

Packaging

1 gallon

5 gallon pail

55 gallon drum

IMPORTANT:

The technical data herein is believed to be accurate. It is offered for your consideration, investigation and verification. Buyer assumes all risk of use, storage, and handling of the product. NO WARRANTY, EXPRESS OR IMPLIED IS MADE, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Nothing contained herein shall be construed as a license to operate under, or recommendation to infringe any patents.

Quick Tip:

To cut down on the number of rags it takes to clean a screen, use a non absorbent scrub pad to liquify the ink and a squeegee to pull all the ink to one end of the screen and wipe up with one or two rags.

SCAQMD Bulletin:

AQ-SOLV is a low VOC Press Wash / Spray & Wipe which meets the requirements of Southern California AQMD to be compliant of 100 grams VOC per liter or less.